

LOPOLIGHT

DECK - SPREADER - INTERIOR LIGHTS



# DECK – SPREADER – INTERIOR LIGHTS

---



Waterproof, rugged, minimalistic, iconic design are the common denominators for the Lopolight range of lights for illumination. All the lights are potted out with epoxy/polyurethane and are vibration proof in addition to the IP68 water proofing.

The materials used are high quality LED's from Cree or Nichia set in paintable silver or black anodized housings with solid driver electronics. As usual we are backing these promises with a strong 5 year warranty.

## THE LOW PROFILE SERIES

---

2 basic shapes – surface or flush mount. These extremely low profile lights are emitting light so they for some versions challenge the light output of a 20W Halogen lamp – whilst only consuming 2,4W. All lights in this series are dimmable.

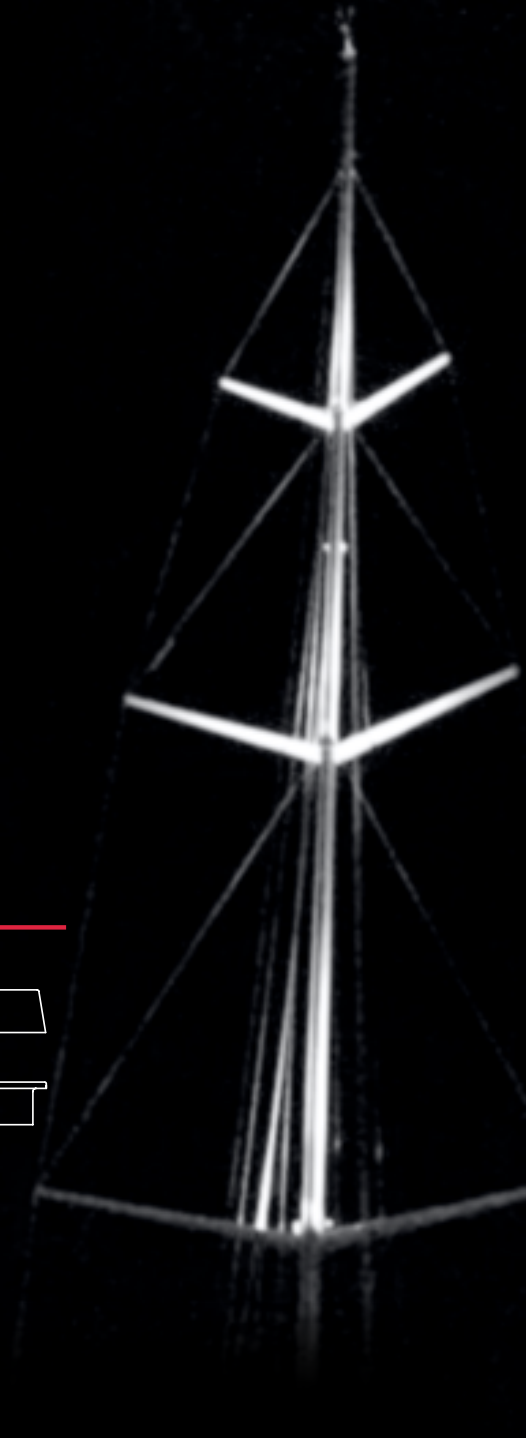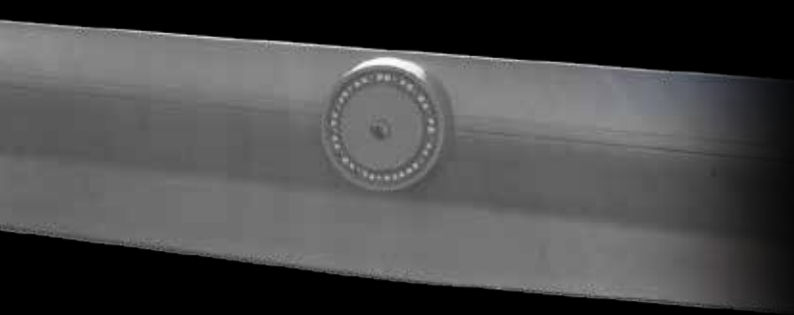


P/N 400-120



P/N 400-122



P/N 400-139



P/N 400-140



Rear side




1: P/N 400-121



P/N 400-123



P/N 400-125



P/N 400-124





Dimmer  
P/N 400-126

## THE PERFECT SPREADER LIGHT

---

6 Watt white high intensity LED light that can be focused to 74°, 36°, 26° or even 6° light beam angles, perfect for up and down lighting mast application. The 10° multi adjustable wedge, supplied with the light ensures a simple and effective installation on all masts. The reflectors can be changed even after installation. Easy and hugely effective.

The light is also available in a flush mount version for in-boom or in-spreader mounting

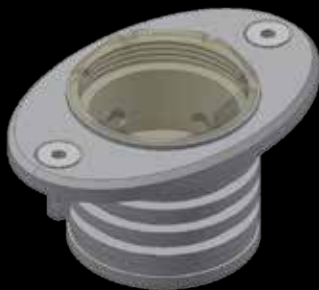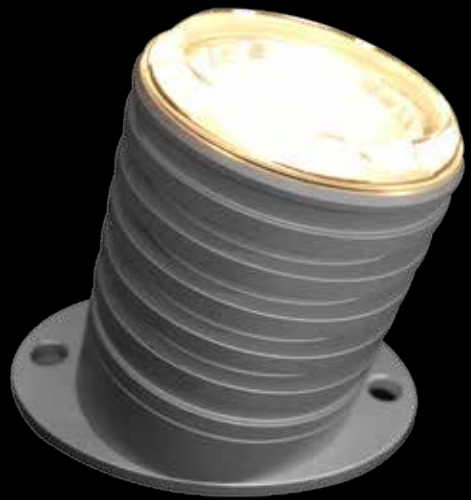

## THE ULTIMATIVE SPREADER LIGHT

---

Built for the largest and most demanding applications this 30W LED is extremely intense. Each of the 3 LED clusters can be individually configured to 74°, 36°, 26° or even 6° light beam (see picture).

The light can be dimmed, using the built-in communication bus. Reducing cable runs on multiple light installation, reducing weight and giving a simpler installation. For larger installations we even have a control panel.



# SPECIFICATIONS

Light colour	Mounting	Power (Watt)	Light beam (Degrees)	Intensity (Lumens)	Voltage (DC)	Dimensions (mm)	Housing colour (anodised)	Part number
THE LOW PROFILE SERIES								
White	Surface mount	2,4W	30°	250 lm	10-32	Ø65x14	Silver	400-120
White	Surface mount	2,4W	30°	250 lm	10-32	Ø65x14	Black-HC	400-120-B
White	Flush mount	2,4W	30°	250 lm	10-32	Ø65x2 + 12	Silver	400-121
White	Flush mount	2,4W	30°	250 lm	10-32	Ø65x2 + 12	Black-HC	400-121-B
White/red	Surface mount	2,4W	30°	170 lm	10-32	Ø65x14	Silver	400-122
White/red	Surface mount	2,4W	30°	170 lm	10-32	Ø65x14	Black-HC	400-122-B
White/red	Flush mount	2,4W	30°	170 lm	10-32	Ø65x2 + 12	Silver	400-123
White/red	Flush mount	2,4W	30°	170 lm	10-32	Ø65x2 + 12	Black-HC	400-123-B
White/blue	Flush mount	2,4W	30°	170 lm	10-32	Ø65x2 + 12	Silver	400-140
Red	Surface mount	2,0W	30°	300 lm	10-32	Ø65x14	Silver	400-125
Red	Surface mount w/2.5M cable	2,0W	30°	300 lm	10-32	Ø65x14	Silver	400-125 2,5M
Red	Surface mount	2,0W	30°	300 lm	10-32	Ø65x14	Black-HC	400-125-B
Green	Surface mount	2,4W	30°	300 lm	10-32	Ø65x14	Silver	400-139
Green	Flush mount	2,4W	30°	300 lm	10-32	Ø65x2 + 12	Silver	400-128
White	Spreader light - Surface	2,4W	30°	250 lm	10-32	Ø65x14	Silver	400-124
White	Spreader light - Surface	2,4W	30°	250 lm	10-32	Ø65x14	Black-HC	400-124-B

## THE PERFECT SPREADER AND BOOM LIGHT

White	Surface mount	6W	6°	1200 lm	10-32	Ø42x57*	Silver	400-082-06
White	Surface mount	6W	6°	1200 lm	10-32	Ø42x57*	Black-HC	400-082-06-B
White	Surface mount	6W	26°	1200 lm	10-32	Ø42x57*	Silver	400-082-26
White	Surface mount	6W	26°	1200 lm	10-32	Ø42x57*	Black-HC	400-082-26-B
White	Surface mount	6W	36°	1200 lm	10-32	Ø42x57*	Silver	400-082-36
White	Surface mount	6W	36°	1200 lm	10-32	Ø42x57*	Black-HC	400-082-36-B
White	Surface mount	6W	74°	1200 lm	10-32	Ø42x57*	Silver	400-082-74
White	Surface mount	6W	74°	1200 lm	10-32	Ø42x57*	Black-HC	400-082-74-B
White	Flush mount	6W	6°	1200 lm	10-32	Ø42x57*	Silver	400-083-06
White	Flush mount	6W	6°	1200 lm	10-32	Ø42x57*	Black-HC	400-083-06-B
White	Flush mount	6W	26°	1200 lm	10-32	Ø42x57*	Silver	400-083-26
White	Flush mount	6W	26°	1200 lm	10-32	Ø42x57*	Black-HC	400-083-26-B
White	Flush mount	6W	36°	1200 lm	10-32	Ø42x57*	Silver	400-083-36
White	Flush mount	6W	36°	1200 lm	10-32	Ø42x57*	Black-HC	400-083-36-B
White	Flush mount	6W	74°	1200 lm	10-32	Ø42x57*	Silver	400-083-74
White	Flush mount	6W	74°	1200 lm	10-32	Ø42x57*	Black-HC	400-083-74-B

## THE ULTIMATIVE SPREADER LIGHT

White	Surface mount	30W	6°	6000 lm	10-32	90 x 55*	Silver	400-080-06
White	Surface mount	30W	6°	6000 lm	10-32	90 x 55*	Black-HC	400-080-06-B
White	Surface mount	30W	26°	6000 lm	10-32	90 x 55*	Silver	400-080-26
White	Surface mount	30W	26°	6000 lm	10-32	90 x 55*	Black-HC	400-080-26-B
White	Surface mount	30W	36°	6000 lm	10-32	90 x 55*	Silver	400-080-36
White	Surface mount	30W	36°	6000 lm	10-32	90 x 55*	Black-HC	400-080-36-B
White	Surface mount	30W	74°	6000 lm	10-32	90 x 55*	Silver	400-080-74
White	Surface mount	30W	74°	6000 lm	10-32	90 x 55*	Black-HC	400-080-74-B

\*) see drawing



Lopolight ApS • Ved Klaedebo 12B • DK-2970 Hoersholm • Denmark  
info@lopolight.com • Tel. +45 3248 5030 • Fax. +45 3248 5032

[www.lopolight.com](http://www.lopolight.com)